

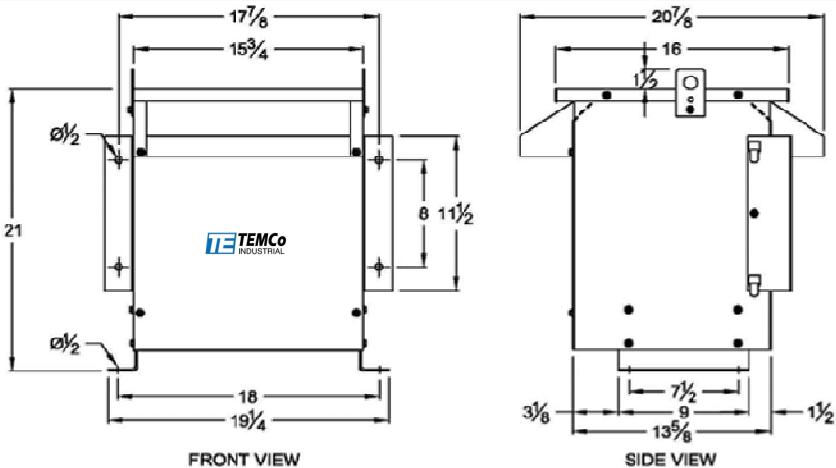
Coils: Copper  
 kVA: 9  
 Primary: 480/240/208 Delta Volts  
 Secondary: 415/400/380 Wye Volts  
 Primary Taps: 5 % @ 480V  
 -Taps FCAN 1  
 -Taps FCBN 1  
 Frequency: 60 Hz  
 BIL: 10 kV  
 Insulation Class: 220 °C  
 Temperature Rise: 150 °C  
 Impedance: 5.0 - 6.5 %  
 Weight: App.155 Lbs  
 - 3 Phase Isolation  
 - Dry Type  
 - ANN Self Cooled

Windings	For Cable Size	Terminations
Primary @ Front	By Customer	Terminal Blocks
Secondary @ Front	By Customer	Terminal Blocks
Ground lug @ the base of enclosure: 2-14 AWG		

**Wiring Connection:**

Primary:	H1-H2-H3	Jumpers To:
Voltage	% Tap	
504	105.0	1-1-1
480	100.0	2-2-2
456	95.0	3-3-3
240	—	4-4-4
208	—	5-5-5
Secondary:		Connect Loads To:
Voltage		X0-X1-X2-X3
415Y/240		X0-X4-X5-X6
400Y/231		X0-X7-X8-X9
380Y/220		

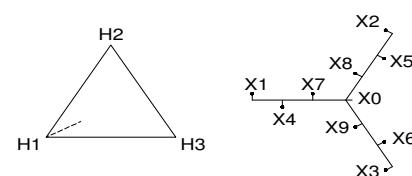
**Note:** Secondary is fully rated - only one to be used at a time


**Standards:**

- 1)- CSA Certified
- 2)- UL Listed

**Standard Features:**

- 1)- Anti-vibration pads installed between the enclosure base and the core & coil assembly
- 2)- Lug for Earth grounding provided


**CSA Enclosure:**

- 1)- Type 3R (NEMA 3R)
- 2)- Ventilated
- 3)- ASA 61 grey
- 4)- Floor mounting

Rev.	Remarks	By	Appr. By	Date

Prepared by: NN  
 Approved by: VS  
 Date: NOV.19, 2025